

STINGRAY ANCHOR



High Holding Power Anchor


Anchors are qualified by IACS classes, such as DNV, GL, RINA, BV, ABS, IRS, NK, KR, CCS. 100% proof load test.

Selectable chain fittings



Anchor End shackle: for connecting the anchor end;

Swivel Forerunners: for connecting anchor with chain cables

Anchor
D Shackle



Swivel

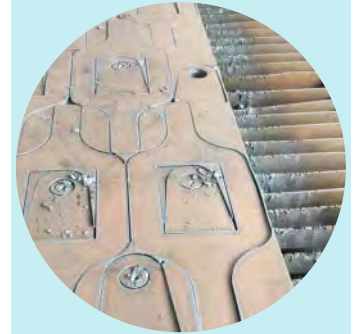

Steel Plate Cutting
Laser cutting machine
for precisely cutting




Proof Load Test
100% proof load test
for each anchor



IACS Qualified Product
Anchors with DNV, LR,
BV, ABS, IRS, RS, RINA,
KR, NK, CCS.

STINGRAY ANCHOR DRAWING & DIMENSIONS

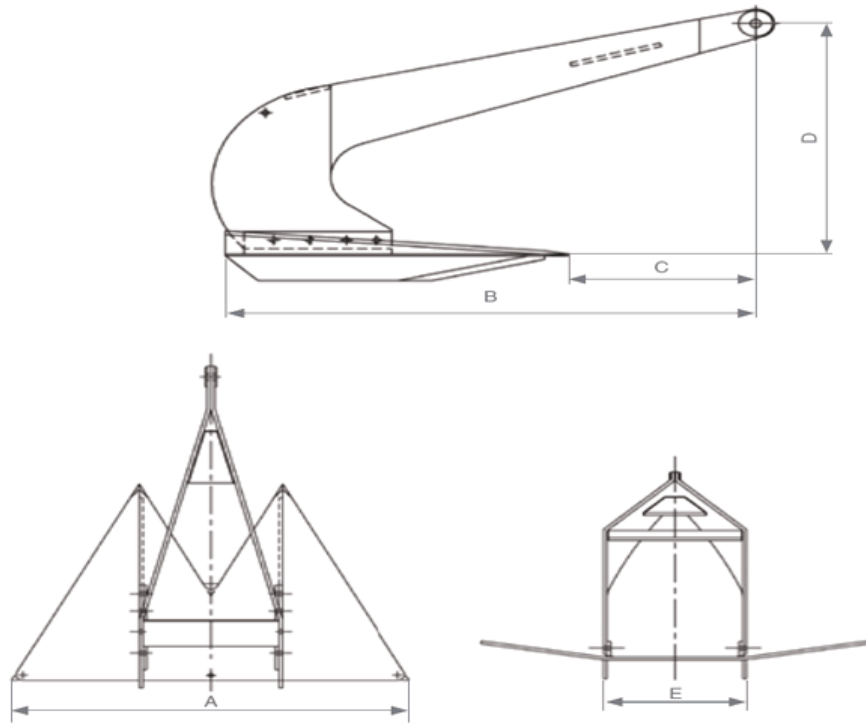

Finishing color: Black, Yellow, Blue, Orange, Green

*More weights & dimension could be offered according to client's request.

Nominal Weight(kg)	A	B	C	D	E	F
50	1013	1023	347	598	368	54
75	1060	1070	363	625	385	58
100	1171	1182	401	691	426	64
150	1258	1271	432	742	458	69
250	1515	1530	519	895	556	83
375	1748	1765	599	1031	635	96
500	2024	2045	694	1190	736	111
750	2222	2243	761	1311	808	122
1000	2491	2516	854	1470	905	136
2000	3078	3109	1055	1817	1119	168
3000	3638	3719	1312	2160	1311	197
5000	4248	4291	1456	2504	1544	232

Producing & Packing



DISASSEMBLED FOR PACKING
To save space and cost for transportation

ASSEMBLED FOR PACKING
For small weight anchors



IACS CERTIFIED QUALITY

